First class EBA shredders protect your secrets

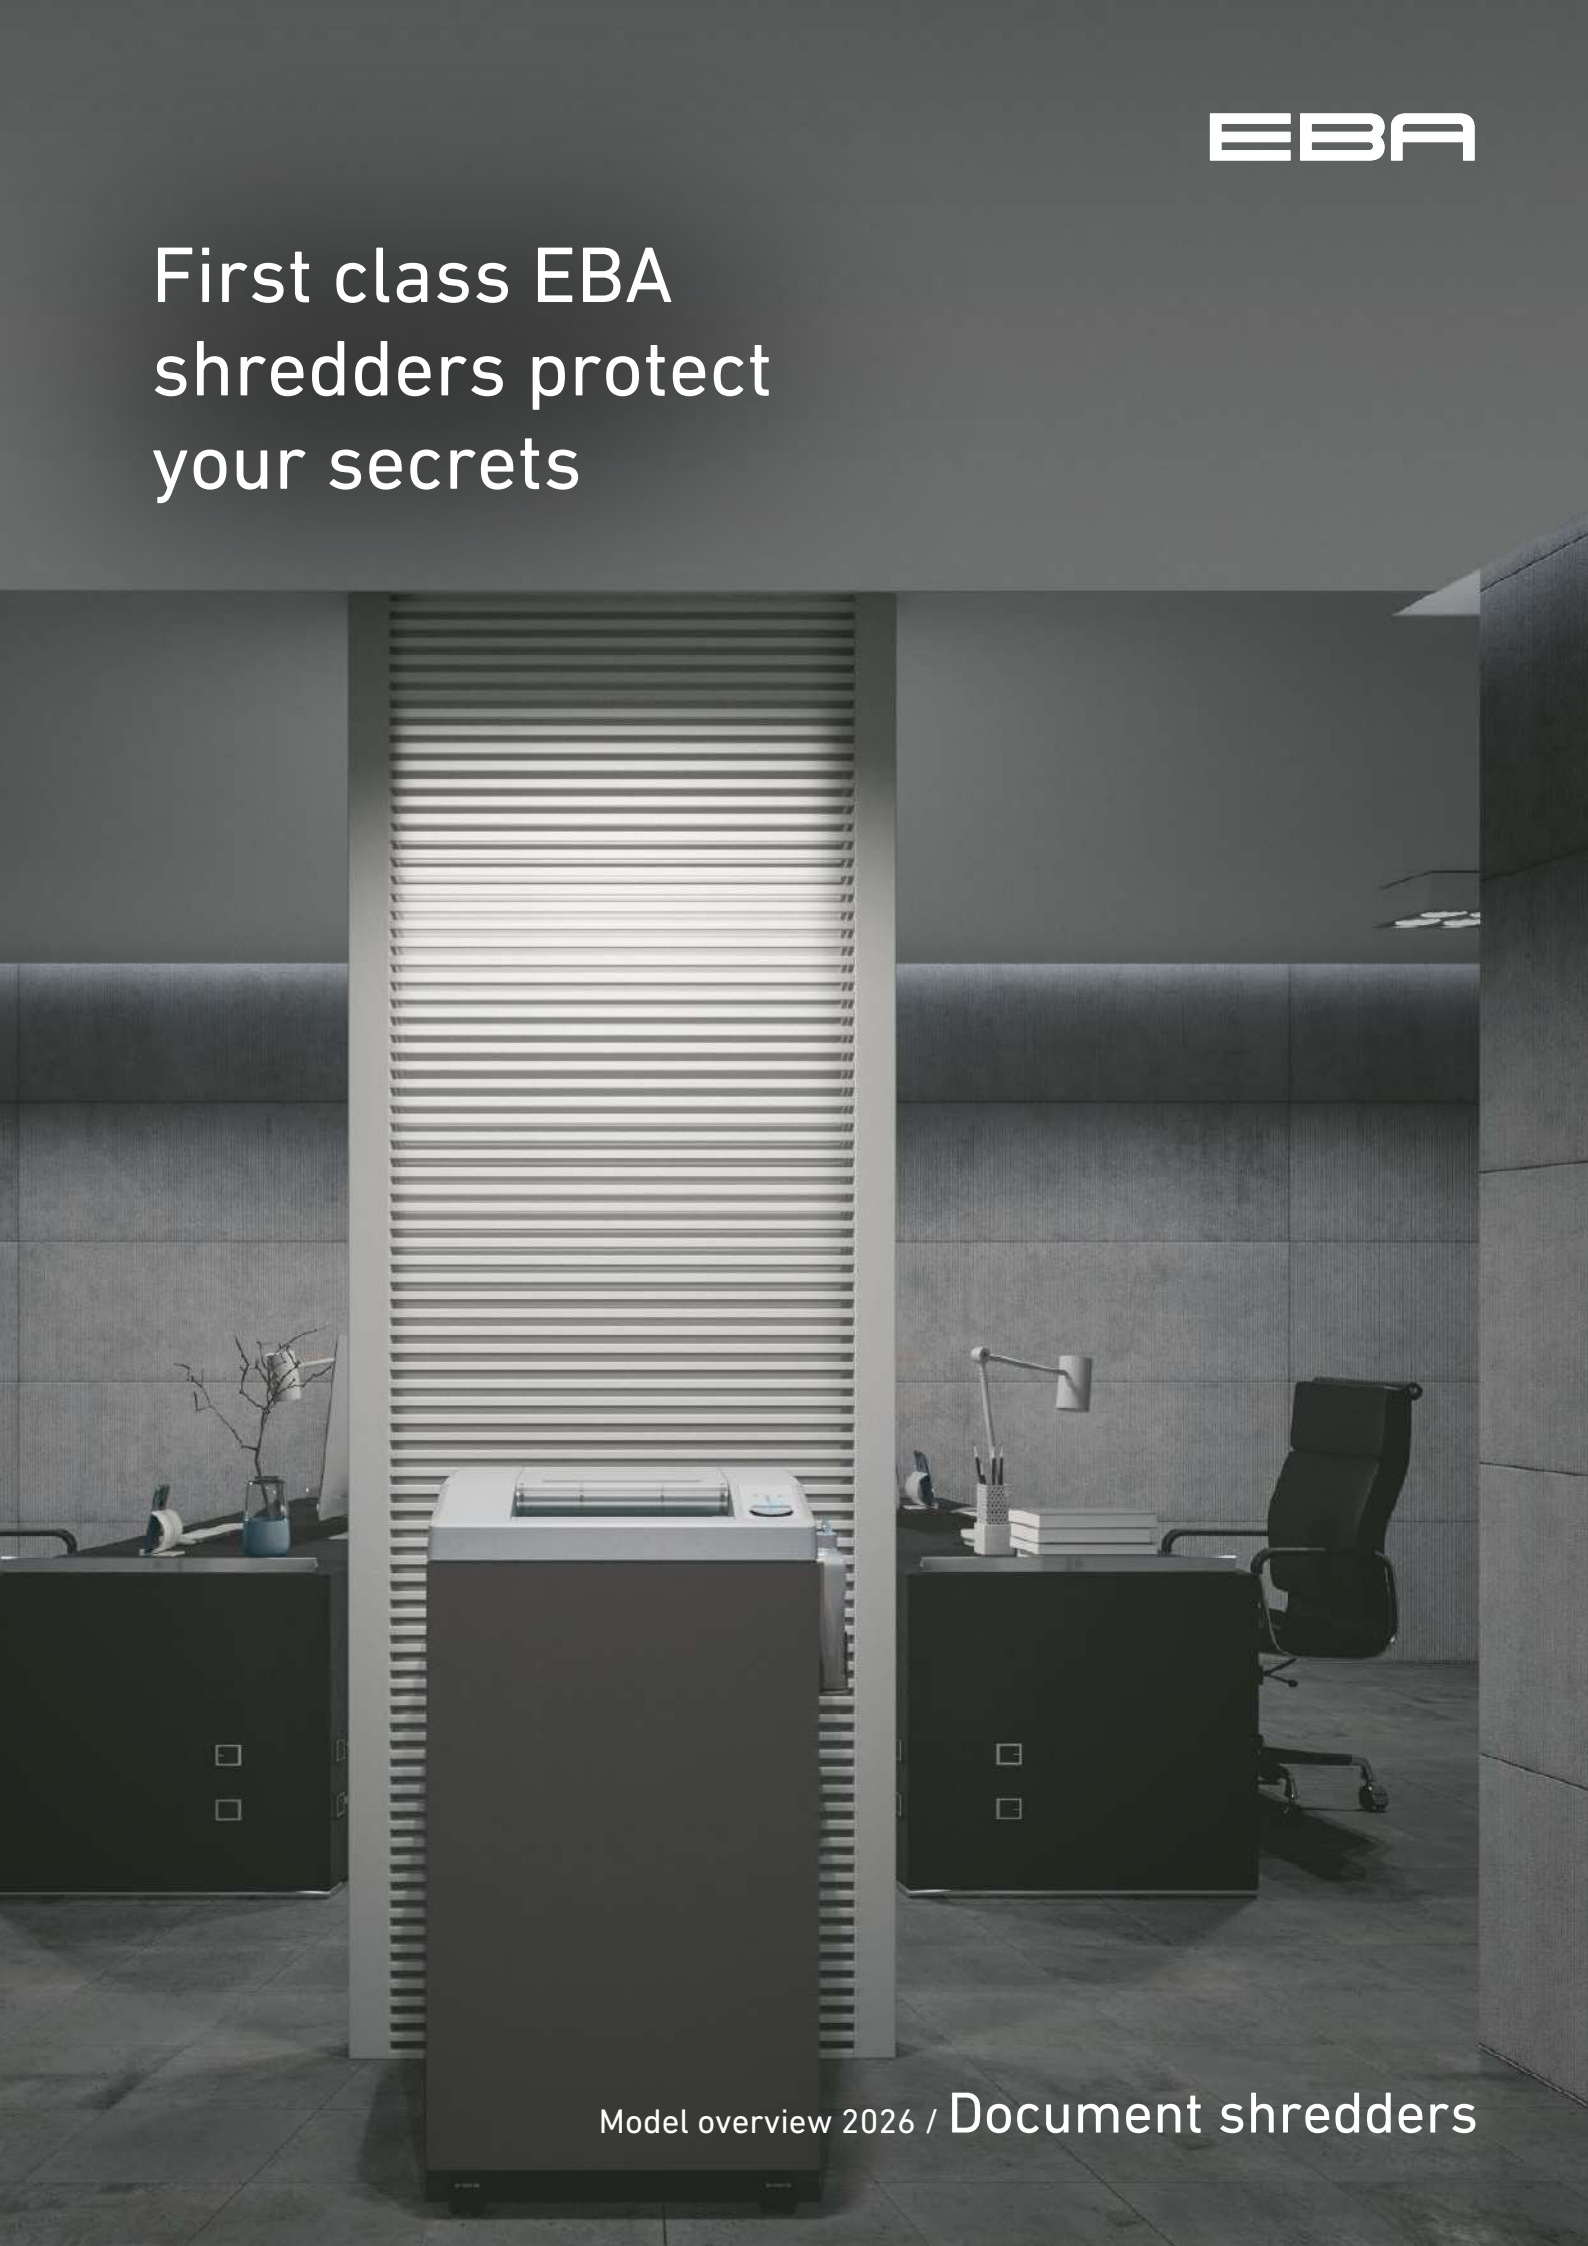

Model overview 2026 / Document shredders

First class quality.
Our standard.

Customers all over the world are pleased about the durability and well-known EBA quality. The longer a product is used, the more sustainable it becomes. That is why our EBA shredders do not have a built-in "expiry date".

High Security.
Made in Germany.

Exceptional quality, reliability and innovative design are what our global customers expect of our products. Benefit from our branded quality Made in Germany supported by a certified Quality Management System according to DIN EN ISO 9001:2015. (The Shredcat models are not manufactured in Germany).

Robust and durable: the cutting heads of EBA shredders are equipped with special hardened, solid steel cutting shafts. We grant a lifetime guarantee of these high-quality cutting shafts under conditions of fair wear & tear (except fine cut, three phase and Shredcat models).

Sustainability has always played a major role in EBA's corporate philosophy. Only first-class, sustainably produced materials are built into our products. We have implemented a certified Environmental Management System according to DIN EN ISO 14001:2015 and a certified Energy Management System which proof that we care about the environment.

We offer professional assistance to handle any questions or technical problems. Moreover, we guarantee that even after a device "Made in Germany" has been discontinued, spare parts will remain available for at least 15 years (from model year 2012).

The environmentally-friendly energy saving function of our shredders, the ZERO ENERGY standby mode, ensures automatic and complete power cut-off after 15 minutes.

We set new standards in terms of quality and efficiency through innovative technologies such as the patented ECC – Electronic Capacity Control: this electronic feature indicates the used sheet capacity during shredding process to avoid paper jams. ECC+ is an improved development of the function.

Ease of operation: EASY-SWITCH is an intelligent control element indicating the operational status of the shredder with varying colour codes and back-lit symbols.

Easy operation is guaranteed with the EASY-TOUCH multifunction switch for stand-by / stop (off) / reverse and optical signals for the operational status of the shredder.

EBA shredders are particularly safe and easy to operate. In this connection, the SPS (Safety Protection System) can certainly be seen as an important milestone. SPS features include, for example, a patented, electronically controlled safety flap in the feed opening; automatic reverse and power cut-off (avoids paper jams); automatic stop if the shred bin is full; electronic door protection; double motor protection against overheating.

Shred automatically: Shredcat Auto-Feed.

No paper stress, no worries: simply load the paper, start the autofeed, and sit back and relax. Shred & Forget – paper in, problem out. The quiet, efficient motor takes care of the rest.

EBA Shredcat Auto-Feed.
Compact. Quiet. Powerful.

EBA Auto-Feed Shredders. For entire stacks of paper – at the push of a button.

NEW

EBA Shredcat 8291*

Innovative, compact auto-feed shredder – shreds up to 150 sheets automatically or 8 sheets manually.

- Clear, easy-to-use control panel with LED indicators
- Automatic feeding of paper stacks up to 150 sheets (80 gsm)
- Manual feeding for up to 8 sheets (80 gsm)
- 220 mm working width
- Auto start / stop via photo cell
- Push buttons for forward / stop / reverse
- Mobile on four castors (two lockable)
- Dimensions (H x W x D): 548 x 360 x 235 mm

EBA Shredcat 8292

Compact auto-feed shredder – shreds up to 200 sheets automatically or 10 sheets manually.

- Clear, easy-to-use control panel with LCD display
- Automatic feeding of paper stacks up to 200 sheets (80 gsm)
- Manual feeding for up to 10 sheets (80 gsm)
- 220 mm working width
- Auto start / stop via photo cell
- Push buttons for forward / stop / reverse
- Mobile on four castors (two lockable)
- Dimensions (H x W x D): 594 x 373 x 255 mm

Model	Shred width, mm	Shredder type	Sheet performance (A4) 70 gsm | 80 gsm	Security level ISO / IEC 21964	Shreds also	Power connection Volts / Hz	Shred bin volume	Motor capacity** W	Weight, kg
EBA **Shredcat 8291 C**	4 x 10	cross cut	up to 150	P-4	⁄ ▭	230 / 50	21 litres	220	10,1
EBA **Shredcat 8292 C**	4 x 10	cross cut	up to 200	P-4	⁄ ▭	230 / 50	26 litres	276	11,6

*** Available in the first quarter of 2026** ** at maximum sheet capacity

Deskside shredders

EBA	Shredcat 8100 NEW*	Shredcat 8200			1126		
Model	**8100 C**	**8200 S**	**8200 C**	**8200 C**	**1126 S**	**1126 C**	**1126 C**
Feed opening, mm	220	220	220	220	220	220	220
Shredder type	cross cut	strip cut	cross cut	cross cut	strip cut	cross cut	cross cut
Shred width, mm	5 x 30	4	4 x 40	2 x 12	4	3 x 25	2 x 15
Performance in sheets, A4 paper 70 g/m²	10-12	16-18	14-16	11-13	11-13	6-7	4-5
Performance in sheets, A4 paper 80 g/m²	8-10	14-16	12-14	10-12	9-11	5-6	3-4
Security ISO / IEC 21964 (DIN 66399)	P-4	P-2	P-4	P-5	P-2	P-4	P-5
Shreds also	🖇 ▭	🖇 ▭	🖇 ▭	🖇 ▭	▭	-	-
Paper clip proof solid steel cutting shafts	-	-	-	-	•	•	•
Lifetime guarantee on the solid steel cutting shafts	-	-			•	•	•
Automatic oiler	-	-			-		
Shred speed, m/sec.	0.03	0.03	0.03	0.03	0.05	0.06	0.06
Volume of cabinet in litres	-	-			-		
Shred bin volume in litres	20	21			20		
Power connection, volts / Hz (single phase)[1]	230 / 50 / 1~	230 / 50 / 1~			230 / 50 / 1~		
Motor capacity, W	144**	185**	220**	360**	200		
Automatic start/stop via photo cell	•	•			•		
Control element	rocker switch (start / stop (off) / reverse)	rocker switch (start / stop (off) / reverse)			EASY-TOUCH		
SPS Safety Protection System:	-	-			-		
– Patented safety flap in the feed opening	-	-			mechanical		
– Automatic reverse / automatic power cut-off	- manual reverse	• reverse function			•		
– Automatic cut-off if shred bin is full	-	•			-		
– Electronic door protection (auto shut-off)	on removal of the shredder head	on removal of the shredder head			-		
– Double motor protection	overheat protection (auto shut-off)	overheat protection (auto shut-off)			•		
– ZERO ENERGY standby mode	-	-			•		
Awarded the "Blue Angel" for high energy efficiency	-	-			•		
Mobile on castors	-	-			-		
Dimensions, mm (H x W x D)	395 x 310 x 195	425 x 348 x 215			428 x 345 x 213		
Weight, kg	4.1	6.8	7.5	7.5	6.5	7.5	7.5

[1] other voltages available

*** Available in the 1st quarter of 2026**

** Motor rating (input), at maximum sheet performance

▭ credit cards
⊚ CDs/DVDs

With optional automatic oiler.

1128			1624					1824		
1128 S	**1128 C**	**1128 C**	**1624 S**	**1624 C**	**1624 C**	**1624 CC**	**1624 CCC**	**1824 S**	**1824 C**	**1824 C**
220	220	220	240	240	240	240	240	240	240	240
strip cut	cross cut	cross cut	strip cut	cross cut	cross cut	fine cut	fine cut	strip cut	cross cut	cross cut
4	3 x 25	2 x 15	4	4 x 40	2 x 15	0.8 x 12	0.8 x 5	4	4 x 40	2 x 15
11-13	6-7	4-5	19-21	13-15	10-12	4-6	4-5	22-24	16-18	11-13
9-11	5-6	3-4	16-18	11-13	8-10	3-5	3-4	19-21	13-15	9-11
P-2	P-4	P-5	P-2	P-4	P-5	P-6	P-7	P-2	P-4	P-5
⊟	-	-	⊟	⊟	⊟	-	-	⊟ ◎	⊟	⊟
•	•	•	•	•	•	-	-	•	•	•
•	•	•	•	•	•	-	-	•	•	•
-			-	optional	optional	optional	optional	-		
0.05	0.06	0.06	0.07	0.06	0.06	0.07	0.07	0.09	0.10	0.10
20			50					50		
20			35					35		
230 / 50 / 1~			230 / 50 / 1~					230 / 50 / 1~		
200			390					580		
•			•					•		
EASY-TOUCH			EASY-SWITCH					EASY-SWITCH		
-			•					•		
mechanical			electronic					electronic		
•			•					•		
-			•					•		
-			•					•		
•			•					•		
•			•					•		
•			•					•		
-			•					•		
516 x 345 x 213			635 x 395 x 291					635 x 395 x 291		
10.5	11.5	11.5	21					22		

The „Blue Angel" is the first and oldest environmental seal in the world. It awards products that, viewed comprehensively, are particularly environmentally friendly and sustainable. IDEAL document shredders set the highest standards in quality, user benefits and environmental friendliness.

www.blauer-engel.de/uz174

Office shredders

Also available with automatic oiler.

Also available with automatic oiler.

EBA	2127			2326					2331			
Model version	2127 S	2127 C	2127 C	2326 S	2326 C	2326 C	2326 CC	2326 CCC	2331 S	2331 C	2331 C	2331 CCC
Feed opening, mm	260	260	260	260	260	260	260	260	310	310	310	310
Shredder type	strip cut	cross cut	cross cut	strip cut	cross cut	cross cut	fine cut	fine cut	strip cut	cross cut	cross cut	fine cut
Shred width, mm	4	4 x 40	2 x 15	4	4 x 40	2 x 15	0.8 x 12	0.8 x 5	4	4 x 40	2 x 15	0.8 x 5
Performance in sheets, A4 paper 70 g/m²	21-23	16-18	10-12	30-32	27-29	16-18	8-10	5-7	30-32	26-28	15-17	9-10
Performance in sheets, A4 paper 80 g/m²	18-20	13-15	8-10	26-28	23-25	14-16	6-8	4-6	26-28	22-24	13-15	8-9
Security ISO / IEC 21964 (DIN 66399)	P-2	P-4	P-5	P-2	P-4	P-5	P-6	P-7	P-2	P-4	P-5	P-7
Shreds also	💳 ◎	💳	💳	💳 ◎	💳 ◎	💳	-	-	💳 ◎	💳 ◎	💳	-
Paper clip proof solid steel cutting shafts	•	•	•	•	•	•	-	-	•	•	•	-
Lifetime guarantee on solid steel cutting shafts	•	•	•	•	•	•	-	-	•	•	•	-
Automatic oiler	-			-	optional	optional	optional	optional	-	optional	optional	standard
Shred speed, m/sec.	0.09	0.10	0.10	0.08	0.10	0.10	0.09	0.09	0.08	0.10	0.10	0.09
Volume of cabinet in litres	100			125					140			
Shred bin volume in litres	75			100					120			
Power connection, volts / Hz (single phase)[1]	230 / 50 / 1~			230 / 50 / 1~					230 / 50 / 1~			
Motor capacity, W	580			750					750	750	750	1500
Automatic start/stop via photo cell	•			•					•			
ECC – Electronic Capacity Control	-			•					•			
Control element	EASY-SWITCH			EASY-SWITCH					EASY-SWITCH			
SPS Safety Protection System:	•			•					•			
– Patented safety flap in the feed opening	electronic			electronic					electronic			
– Automatic reverse / automatic power cut-off	•			•					•			
– Automatic cut-off if shred bin is full	•			•					•			
– Electronic door protection	•			•					•			
– Double motor protection	•			•					•			
– Zero energy standby mode	•			•					•			
Awarded the "Blue Angel" [2]	•			•					•			
High quality wooden cabinet, mobile on castors	•			•					•			
Dimensions, mm (H x W x D)	870 x 500 x 377			926 x 495 x 470					930 x 538 x 470			
Weight, kg	30	30.5	30.5	48					52			

[1] other voltages available

[2] for high energy efficiency

💳 credit cards
◎ CDs/DVDs
diskettes

With automatic oiler as standard.

CCC with automatic oiler as standard.

Also available with automatic oiler.

With automatic oiler as standard.

5131			3240				3340				5141				
5131 C	**5131 C**	**5131 CCC**	**3240 S**	**3240 C**	**3240 C**	**3240 CCC**	**3340 S**	**3340 C**	**3340 C**	**3340 CCC**	**5141 S**	**5141 C**	**5141 C**	**5141 CC**	**5141 CCC**
310	310	310	400	400	400	400	400	400	400	400	405	405	405	405	405
cross cut	cross cut	fine cut	strip cut	cross cut	cross cut	fine cut	strip cut	cross cut	cross cut	fine cut	strip cut	cross cut	cross cut	fine cut	fine cut
4 x 40	2 x 15	0.8 x 5	6	4 x 40	2 x 15	0.8 x 5	6	4 x 40	2 x 15	0.8 x 5	6	4 x 40	2 x 15	0.8 x 12	0.8 x 5
40-45	25-30	12-13	28-31	22-25	10-13	4-5	43-45	34-36	16-18	8-9	50-55	40-45	25-30	15-17	12-13
34-39	21-26	11-12	24-27	19-22	8-11	3-4	37-39	30-32	13-15	7-8	42-47	34-39	21-26	13-15	11-12
P-4	P-5	P-7	P-2	P-4	P-5	P-7	P-2	P-4	P-5	P-7	P-2	P-4	P-5	P-6	P-7
⊟ ◎ 🖫	⊟ ◎	-	⊟ ◎	⊟ ◎	⊟	-	⊟ ◎ 🖫	⊟ ◎	⊟	-	⊟ ◎ 🖫	⊟ ◎ 🖫	⊟ ◎	-	-
•	•	-	•	•	•	-	•	•	•	-	•	•	•	-	-
•	•	-	•	•	•	-	•	•	•	-	•	•	•	-	-
standard			-	-	-	standard	-	optional	optional	standard	standard				
0.15	0.15	0.15	0.11	0.08	0.10	0.15	0.11	0.08	0.10	0.15	0.19	0.15	0.15	0.15	0.15
180			200				200				210				
140			165				165				165				
230 / 50 / 1~			230 / 50 / 1~				230 / 50 / 1~				230 / 50 / 1~				
1600			750				1500				1600				
•			•				•				•				
•			ECC+				ECC+				•				
EASY-SWITCH			EASY-SWITCH				EASY-SWITCH				EASY-SWITCH				
•			•				•				•				
electronic			electronic				electronic				electronic				
•			•				•				•				
•			•				•				•				
•			•				•				•				
•			•				•				•				
•			•				•				•				
•			•				•				•				
•			•				•				•				
1020 x 548 x 590			945 x 640 x 550				945 x 640 x 550				1010 x 640 x 590				
102			73	79	79	79	75	81	81	81	115				

The „Blue Angel" is the first and oldest environmental seal in the world. It awards products that, viewed comprehensively, are particularly environmentally friendly and sustainable. IDEAL document shredders set the highest standards in quality, user benefits and environmental friendliness.

www.blauer-engel.de/uz174

High capacity shredders

With automatic oiler as standard.

EBA		5346		
Model		**5346 C**	**5346 C**	**5346 C**
Feed opening, mm		460	460	460
Shredder type		cross cut	cross cut	cross cut
Shred width, mm		6 x 50	4 x 40	2 x 15
Performance in sheets, A4 paper 70 g/m²		85-95	65-75	35-45
Performance in sheets, A4 paper 80 g/m²		74-83	56-65	30-39
Security level ISO / IEC 21964 (DIN 66399)		P-3	P-4	P-5
Shreds also		▭ ◎ 🖫	▭ ◎ 🖫	▭ ◎ 🖫
Shredding head takes soft metal objects		•	•	•
Guarantee on the cutting shafts		2 years	2 years	2 years
Shred speed, m/sec.		0.17		
Oil injection on the cutting shafts (standard equipment)		automatic		
Shred collection in		mobile shred bin		
Capacity for shreds, litres		230		
Power connection, volts / Hz (three phase)[1]		400 / 50 / 3P+N+PE		
Motor capacity, kW		2.2		
Automatic start/stop via photo cell		•		
Control element		EASY-SWITCH		
Illumination of the working area		•		
Automatic reverse / automatic power cut-off		• / •		
Automatic cut-off if shred bag is full		•		
Electronic door protection		•		
Thermal overload switch		•		
Automatic standby after 30 minutes		•		
Movable on castors		•		
Dimensions, mm (H x W x D)		1700 x 740 x 765		
Weight, kg		253		
Accessories (optional):	Modular conveyor belt system	-		
	Second shred trolley	-		

[1] other voltages available

▭ credit cards
◎ CDs/DVDs
🖫 diskettes
lever arch files

With automatic oiler as standard.

With manual oiler as standard.

6340				7050	
6340 S	**6340 C**	**6340 C**	**6340 C**	**7050-2 C**	**7050-3 C**
410	410	410	410	500	500
strip cut	cross cut	cross cut	cross cut	cross cut	cross cut
6	6 x 50	4 x 40	2 x 15	8 x 40-80	6 x 50
100-120	85-100	65-75	43-48	600-700	300-400
87-105	74-87	56-65	37-42	500-600	250-350
P-2	P-3	P-4	P-5	P-2	P-3
⊟ ◎ 🖫	⊟ ◎ 🖫	⊟ ◎ 🖫	⊟ ◎ 🖫	🖫 🖫	🖫 🖫
•	•	•	•	•	•
2 years	2 years	2 years	2 years	2 years	2 years
0.26				0.21 / 0.12 (variable shred speed »2-MATIC«)	
automatic				manual	
suspension for disposable plastic bags with pull-out mechanism on wheels				shred trolley	
300				300	
400 / 50 / 3P+N+PE				400 / 50 / 3P+N+PE	
4.0	3.0	3.0	3.0	9.0 (2 x 4.5)	
-				-	
EASY-SWITCH				panel with push buttons	
•				-	
• / •				• / •	
•				•	
•				•	
•				•	
•				-	
•				•	
1440 x 1240/690[2] x 1700				1714 x 1036 x 2170/3070[3]	
357				1130	
-				•	
-				•	

[2] transportation width (without side tables)
[3] depth with conveyor belt system

www.eba.de

The technical data is approximate. Subject to change. Printed in Germany. 12/2025

Valid from 2026